


DB100 - BLOW LABELLING

DB100 is ideal where non-contact labelling is preferred (like on bread, groceries etc) - and where the distance to product is short. The DB100 is therefore seen in many bakeries and in other kind of food industries.

The DB100 has the reliable, robust and easy to use design - as seen on all the Mectec family machines. It is proven to give you 24 hours reliable labelling for many years to come - even in the most harsh industrial environments!

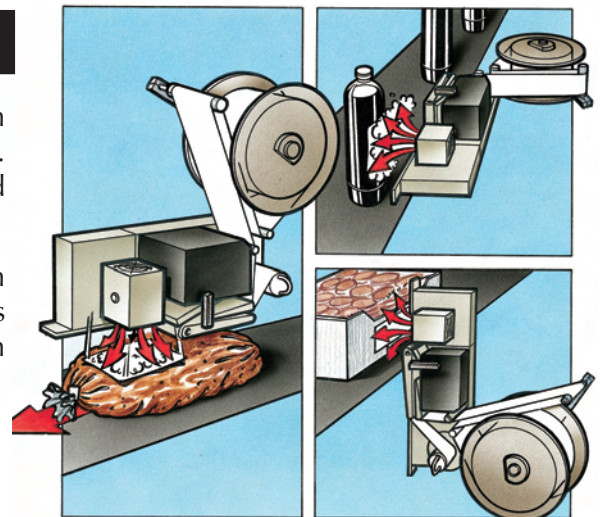

Labelling on different kind of products.
Applies on on both moving and stationary products!

The applicator can be opened for service etc.



Printer and applicator in left hand version



Handheld terminal
TG300
(optional)



Printer Control Unit PCU III

TECHNICAL DATA

Type of applicator:	Blow
Blow box size:	100 x 100 mm
Print speed:	Up to 300 mm/sec
Resolution:	8 or 12 dots/mm 200/300 DPI
Interface:	2 x RS232, 1 x RS485, 1 x USB 2.0 (Ethernet optional)
Overall dimensions:	597 x 506 x 234 mm (l x h x w) - P & A 406 x 265 x 128 mm (l x h x w) - PCU III
Controller functions:	On-Line and Stand Alone operation, 2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets and much more...!

FAST FACTS

Printer:	4" Direct Thermal
Application:	Top, bottom or side labelling Stationary or moving object
Label size:	40 x 30 - 100 x 100 mm
Distance:	0 - 50 mm

Available in both right- and left hand version!

ACCESSORIES

- TG300 - Handheld terminal
- Warning Low Level Media
- Cabinets
- Label Check in the Applicator Pad
- Flashlight/Beacon
- Check scanner
- Fixed or adjustable stands

Manufactured by:

Mectec Elektronik AB

Agnesfridsvägen 189, SE-213 75 Malmö, Sweden

P: +46 40 689 25 00 • F: +46 40 689 25 25

info@mectec.se • www.mectec.com

Distributed by: