

TP602

TP602 - PALLET LABELLING (2 stops)


The TP602 is a system for automatic 2-side pallet labelling - requiring two stops of the pallet - when labelled on two adjacent sides.


The TP602 has the reliable, robust and easy to use design

- as seen on all the Mectec family machines.

It is proven to give you 24 hours reliable labelling for many years to come


- even in the most harsh industrial environments!



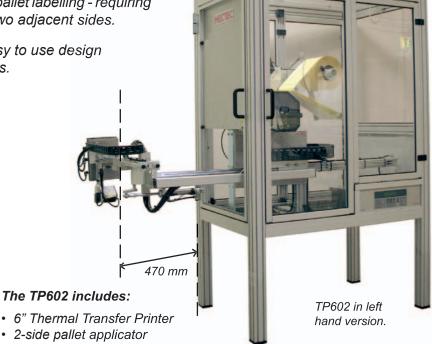

· 6" Thermal Transfer Printer

- PCU III Control unit
- Cabinet with three doors Warning - low level labels
- Warning low level ribbon
- Flashlight/beacon
- Check scanner
- Air regulator, soft start valve
- Harting Industrial Connectors



Labelling procedure.

TECHNICAL DATA

Tamp/Tamp-Blow. The blow can be Type of applicator:

switched off

Tamp size: 150 x 210 mm

Print speed: Up to 275 mm/sec

Interface: 2 x RS232, 1 x RS485, 1 x USB 2.0

(Ethernet optional)

Cabinet dimensions: 1050 x 680 mm (l x w)

The total height is dependent of label

position and conveyor height.

8 or 12 dots/mm 200/300 DPI

Controller functions: On-Line and Stand Alone operation,

2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets

and much more ...!

FAST FACTS

Printer: 6" Thermal Transfer

Application: One label is applied on the front

(or back) and one on the side of a stationary pallet (2 Stops required)

Label size: A5 portrait (150x210 mm)

preferred

Distance: 470 mm from the cabinet to the

applicator pad

Available in both right- and left hand version!

ACCESSORIES

CABINET

· Emergency stop

· Door interlock switches

Fan / heating / climate control

· Electrical height adjustment

Pneumatic hatch / Sealed doors

PC-Module

OTHER

· TG300 - Handheld terminal

Label Check in Applicator Pad

Distributed by:

Manufactured by:

Resolution:

Mectec Elektronik AB

Agnesfridsvägen 189, SE-213 75 Malmö, Sweden P: +46 40 689 25 00 • F: +46 40 689 25 25

info@mectec.se • www.mectec.com